

Submersible Stainless Sewage Pumps

SSQ





FEATURES:

- Power : 1 ~ 5 HP
- 2 Poles Motor
- Equipped with Viton Mechanical Seal



SPECIFICATIONS:

Type	Motor			Pump			Cable	Wt.	
	Power	Phase	Volt	Bore	Max. Head	Max. Flow			
	HP	PH	V	Inch	M	L/min	M	Kg	
SSQ-111	1	1	110	2"	10	380	6	26	
SSQ-112			220						
SSQ-132		3	220~440						
SSQ-111L		1	1	110	3"	10	500	6	28
SSQ-112L				220					
SSQ-132L			3	220 ~ 440					
SSQ-212	2	1	220	3"	14	600	10	44	
SSQ-232		3	220 ~ 440					38	
SSQ-312	3	1	220	4"	18	800	10	53	
SSQ-332		3	220 ~ 440					45	
SSQ-532	5	3	220 ~ 440	4"	26	1,000	10	49	

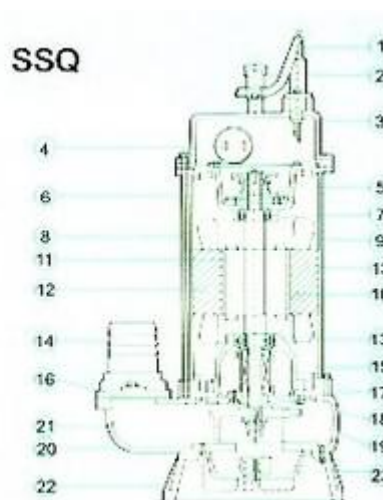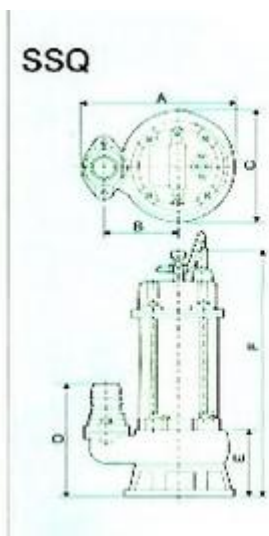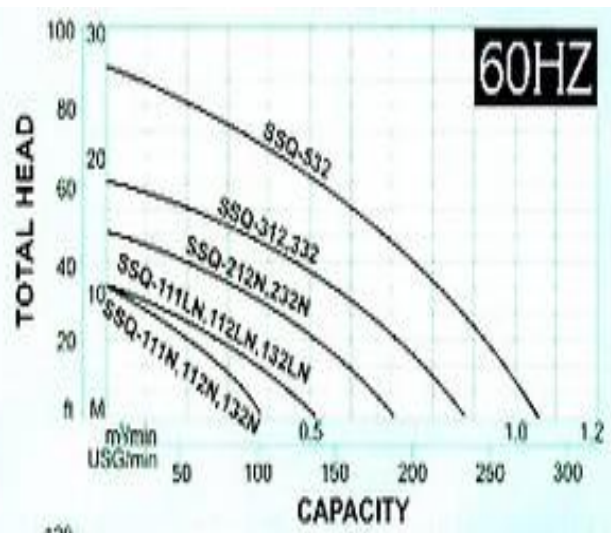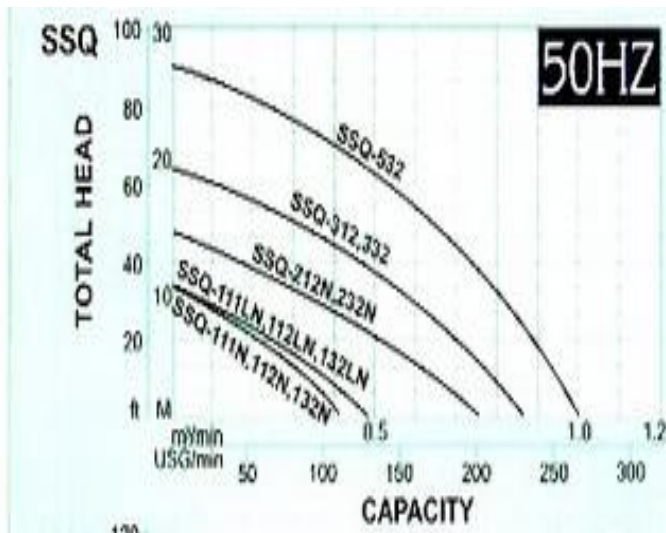

ITEM NO.	PARTS LIST	MATERIAL
1	Cable	V. C. T.
2	Handle	Stainless Steel (#304)
3	Motor Head Cover	Stainless Steel Casting
4	Condenser	12" only
5	Centrifugal Switch	12" only
6	Upper Bracket	Stainless Steel Casting
7	Upper Ball Bearing	
8	Ball	Stainless Steel
9	Coil	
10	Shaft	Stainless Steel
11	Rotor	Steel Plate
12	Stator	Steel Plate
13	Motor Casing	Stainless Steel (#304)
14	Hose Coupling	2" - Plastic
15	Mechanical Seal	Silicon Carbide - Viton
16	Flange Setter	Stainless Steel Casting
17	Motor Lower Cover	Stainless Steel Casting
18	Mechanical Seal Cover	Stainless Steel Casting
19	Oil Seal	Viton
20	Pump Casing	Stainless Steel Casting
21	Impeller	Stainless Steel Casting
22	Suction Cover	Stainless Steel Casting
23	Strainer	Mastic

P. 5. Stainless Steel Casting - SS 316 (#304)